


**4 Wheel Drive-Boat 7.5m**  
 CAR Width : 1.94 Lock to Lock Time : 6.00  
 Trailer Width : 2.50 Steering Angle : 40.0  
 CAR Track : 1.61 Articulating Angle : 70.0  
 Trailer Track : 2.22

**LARGE CAR/TRAILER UNIT**

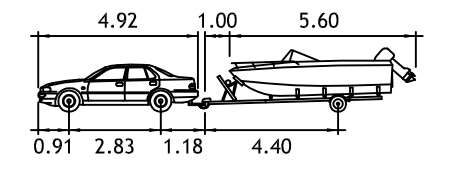

**Sedan-Boat**  
 Car Width : 1.86 Lock to Lock Time : 6.00  
 Trailer Width : 2.45 Steering Angle : 31.2  
 Car Track : 1.56 Articulating Angle : 70.0  
 Trailer Track : 2.00

**MEDIUM CAR/TRAILER UNIT**


**GENERAL NOTES:**

1. NUMBER OF CAR/TRAILER PARKING BAYS PER RAMP TO AUSTRALIAN STANDARD 3962. 50% PAVED AND 50% TURF OVERFLOW PARKING.
2. MINIMUM STRAIGHT REVERSING DISTANCE TO TOP OF RAMP 30.0m.
3. MINIMUM WIDTH OF HOLDING JETTY 1.2m.
4. LAYOUT AND DESIGN OF RAMPS SHALL COMPLY TO AUSTRALIAN STANDARD 3962.
5. MATERIAL DURABILITY SHALL COMPLY TO AUSTRALIAN STANDARD 4997.

Department of Transport Western Australia

**BOAT LAUNCHING FACILITY  
 TYPICAL LAYOUT**

SHEET 1 OF 2 - REV\_A



DIAGRAMMATIC